

09/237860

FIG. 1


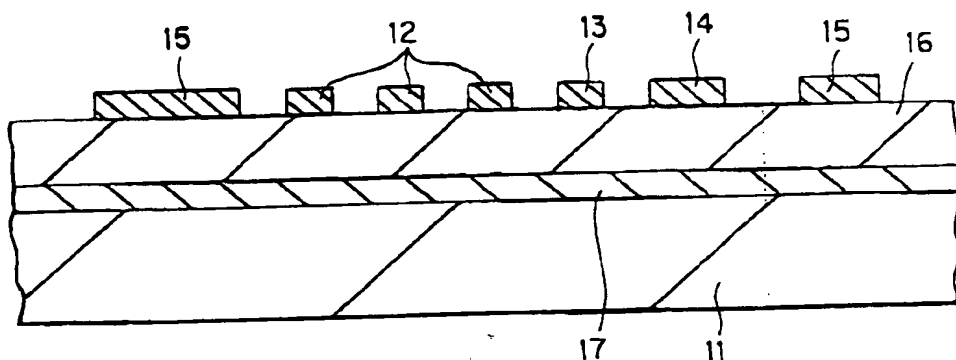



FIG. 2

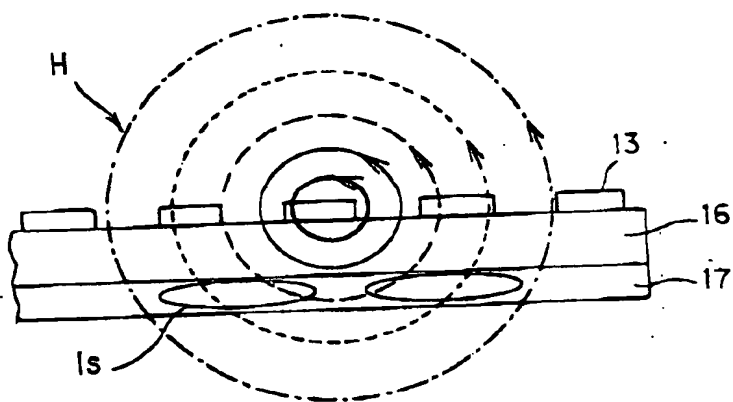

09237860-012799

[illegible]

Is

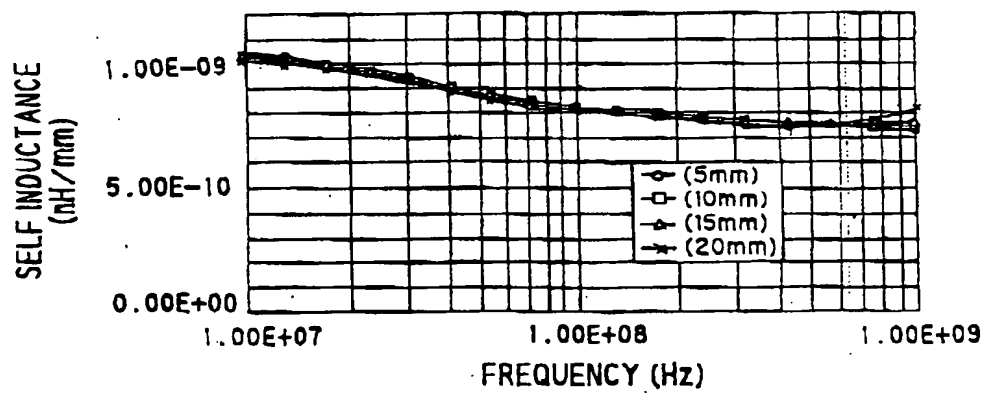

662210-0984260

FIG.5

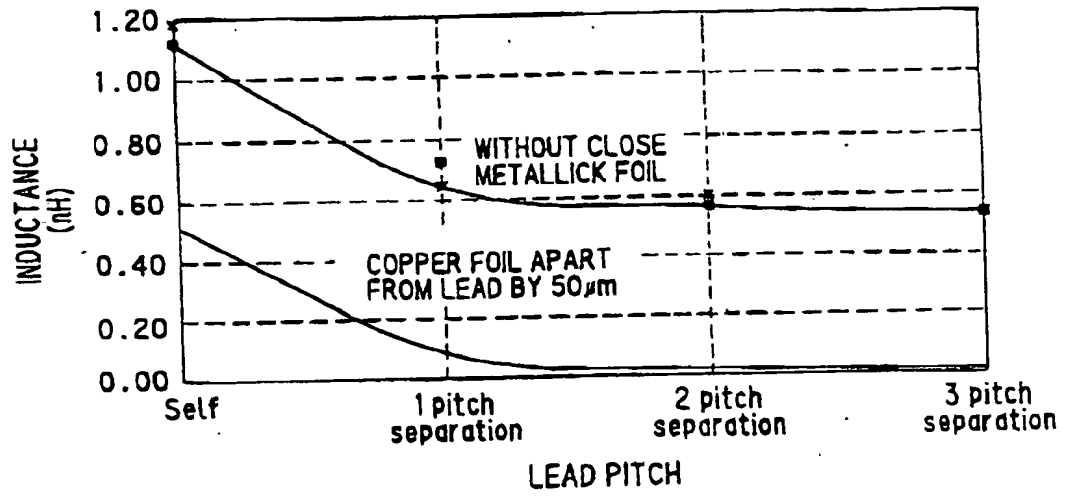


FIG.6


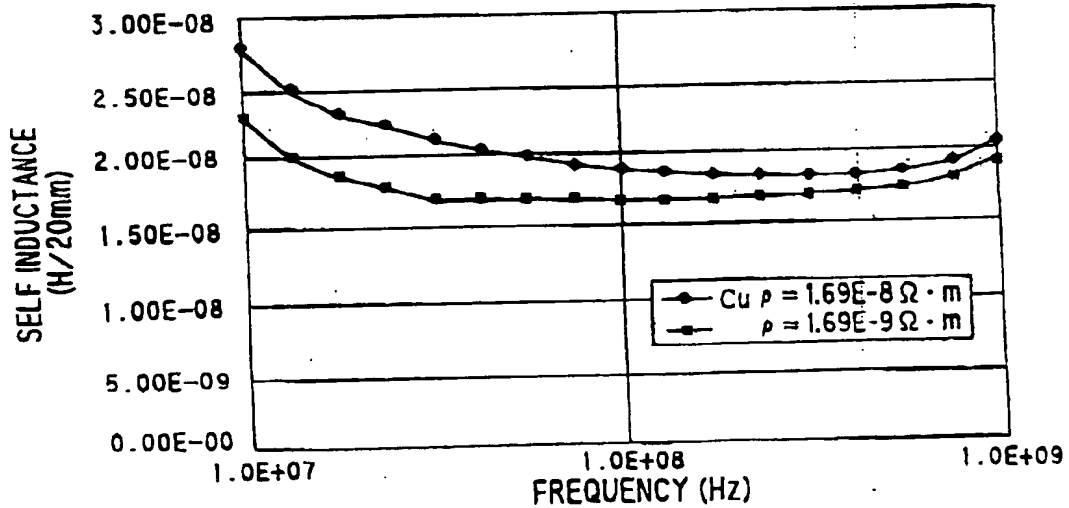


FIG. 7

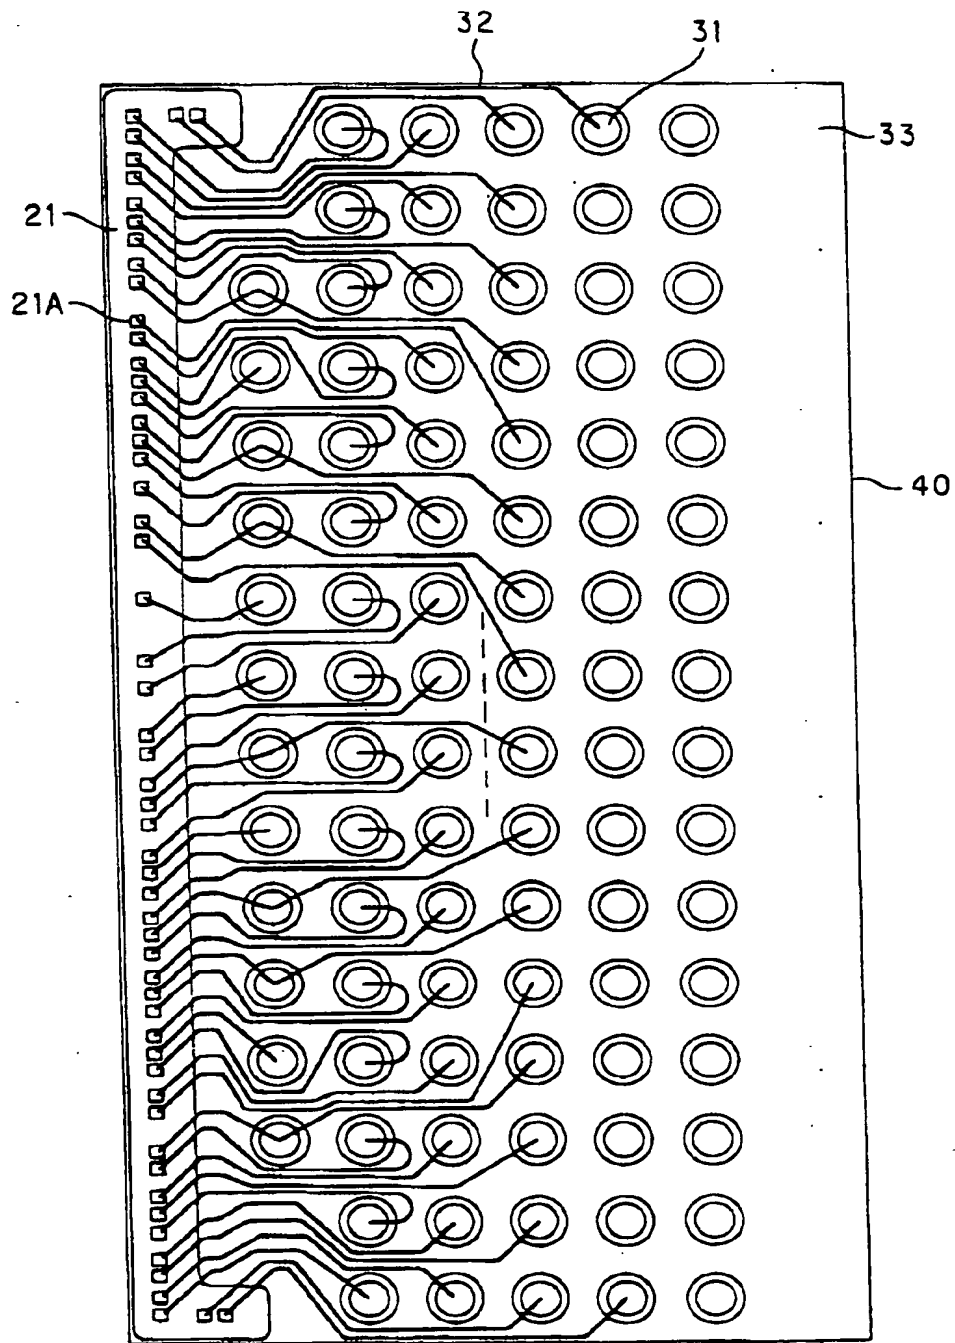

09237850-012799

09-2650-0176

FIG. 8



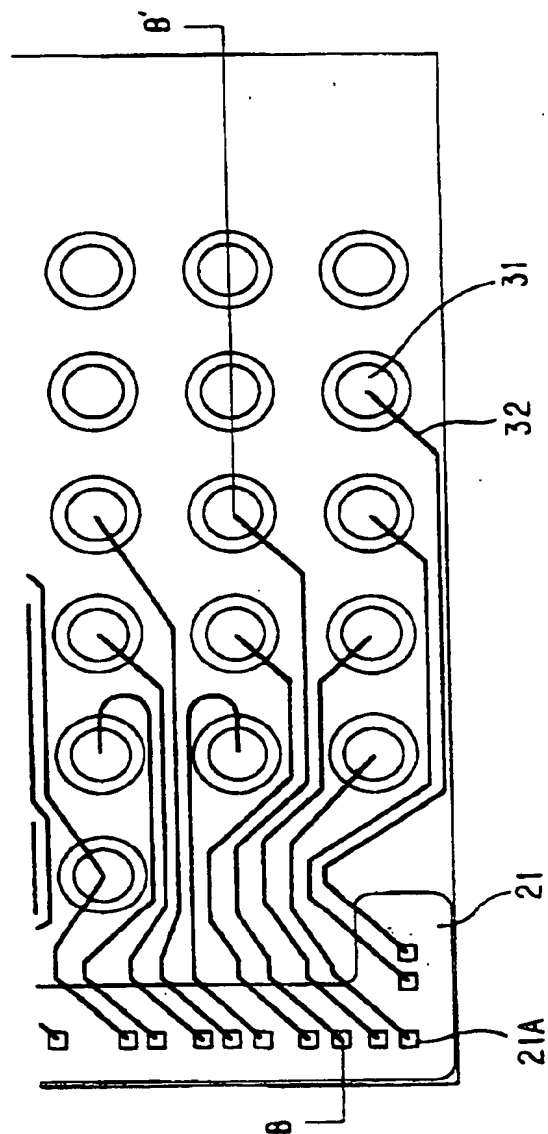


FIG. 9

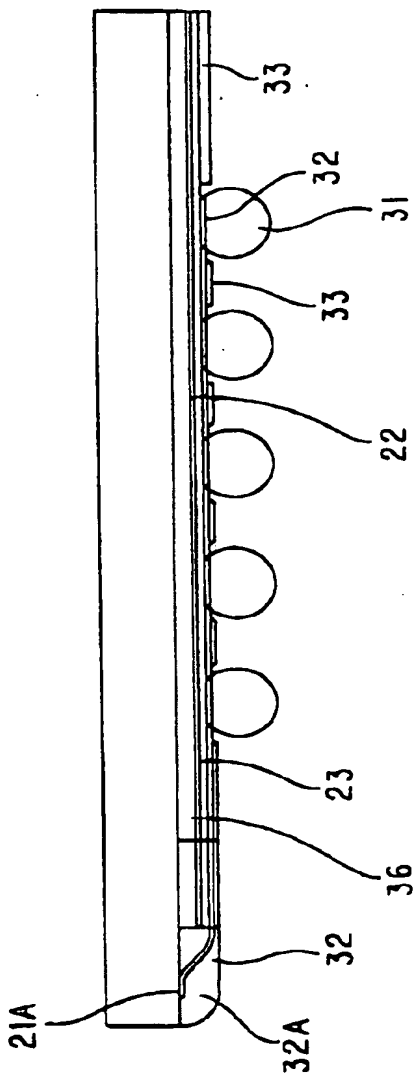


0923860-012799

FIG.10

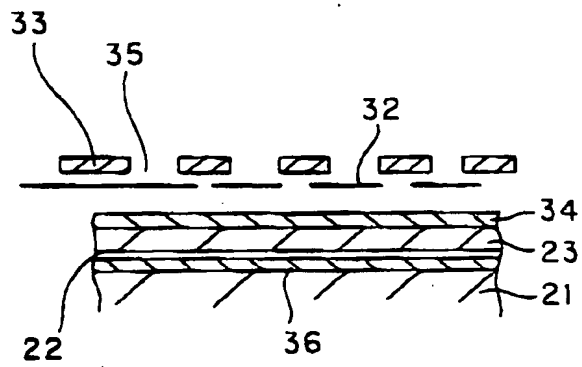

00227860-01279

FIG.12

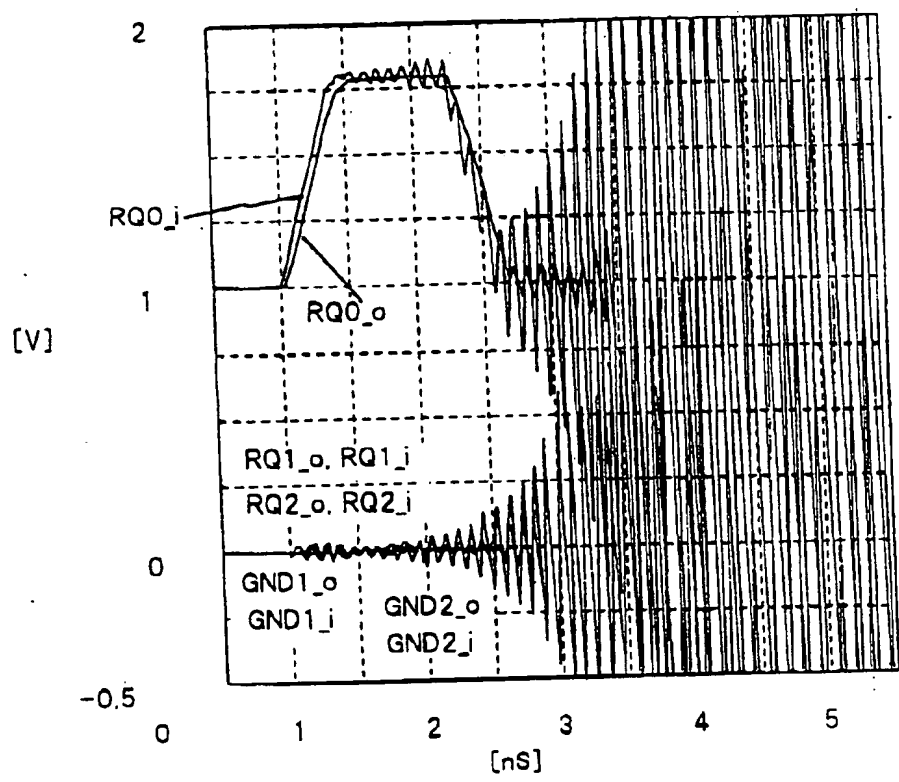

(a) LEAD INTERVAL AS SHOWN

FIG. 11(A)



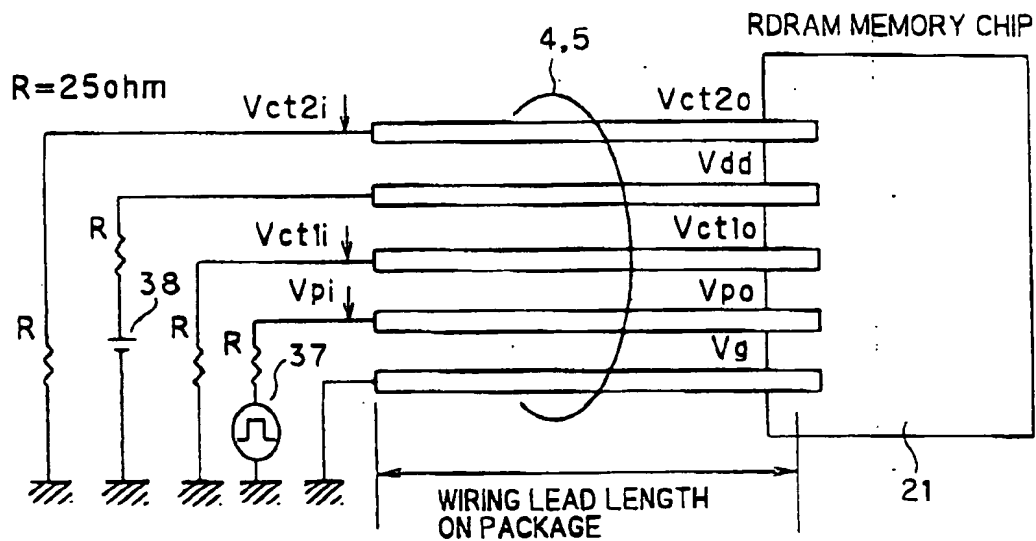


FIG. 11(B)

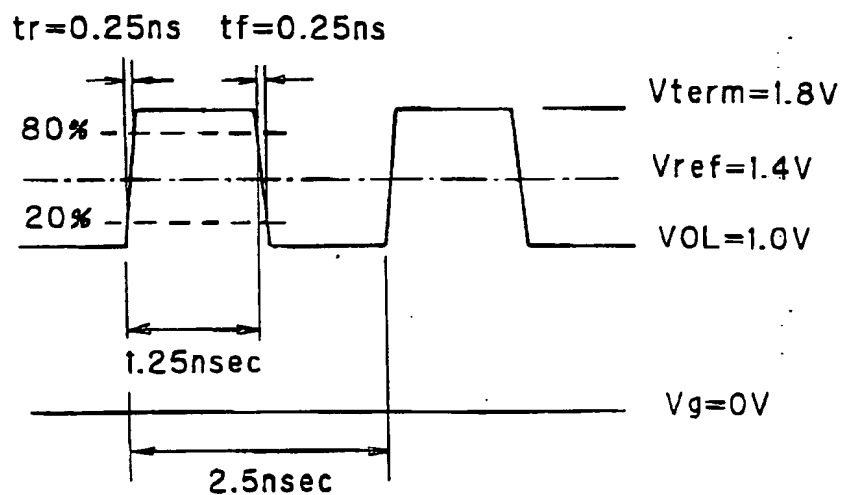


00237850-012799

FIG.13

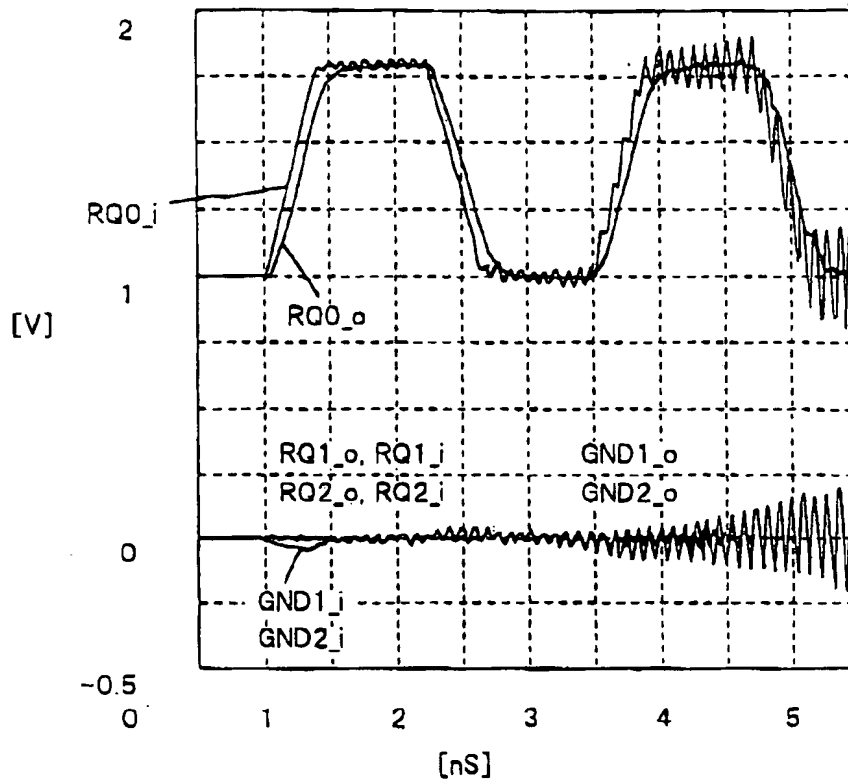

(b) NARROW PORTION OF LEAD BEING SET TO 150 μm

FIG.14

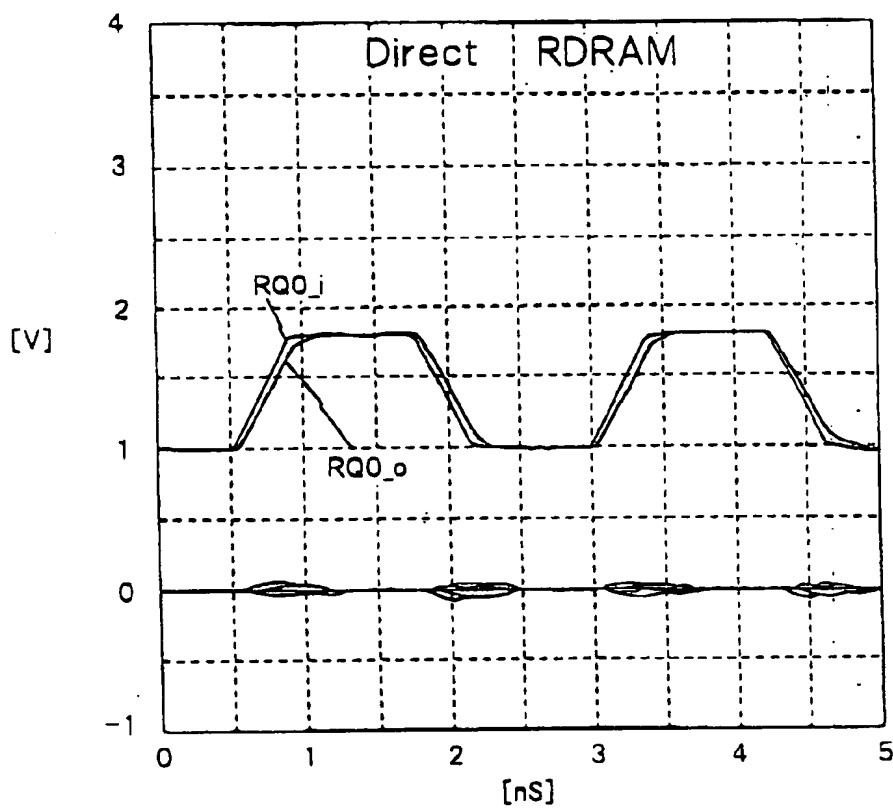

(c) CALCULATION OF CASE WITH ELECTROMAGNETIC SHIELDING FILM

FIG. 15(A)

FIG. 15(B)

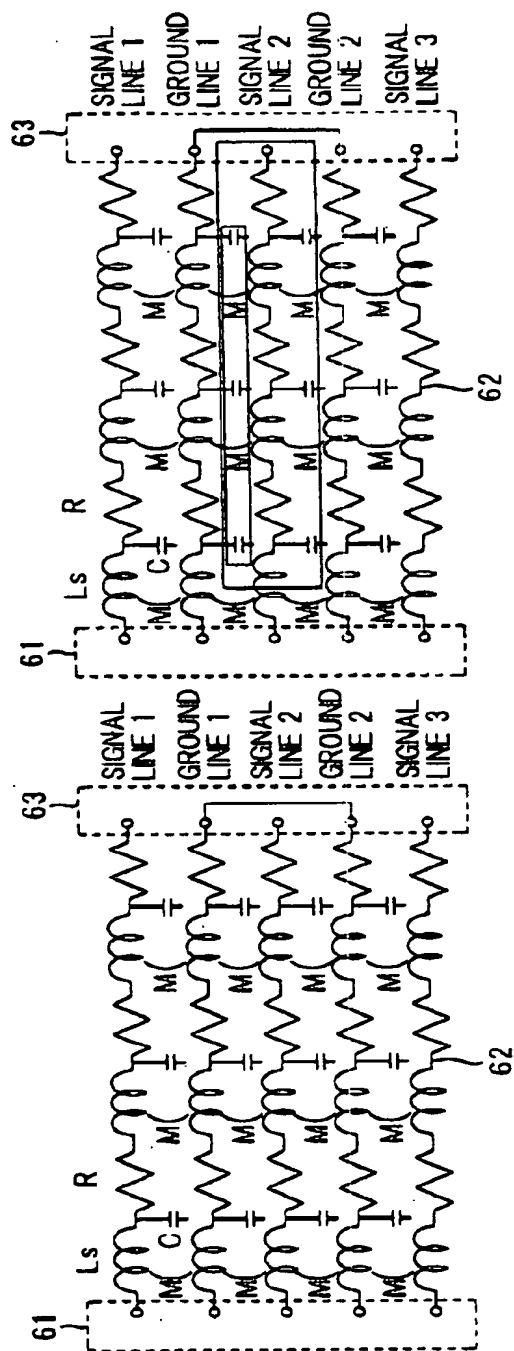


FIG. 16(A)

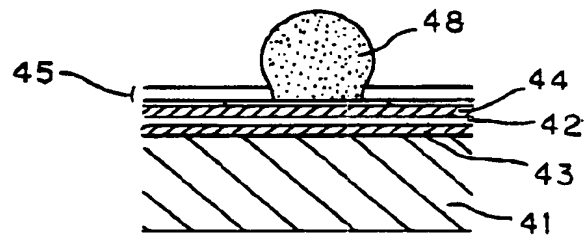


FIG. 16(B)

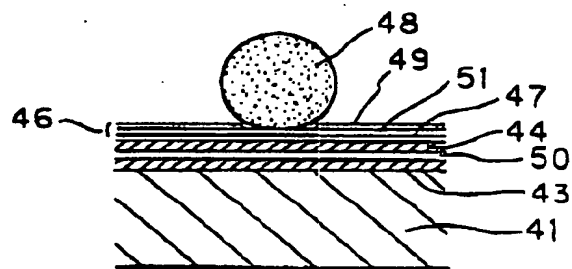


FIG. 17

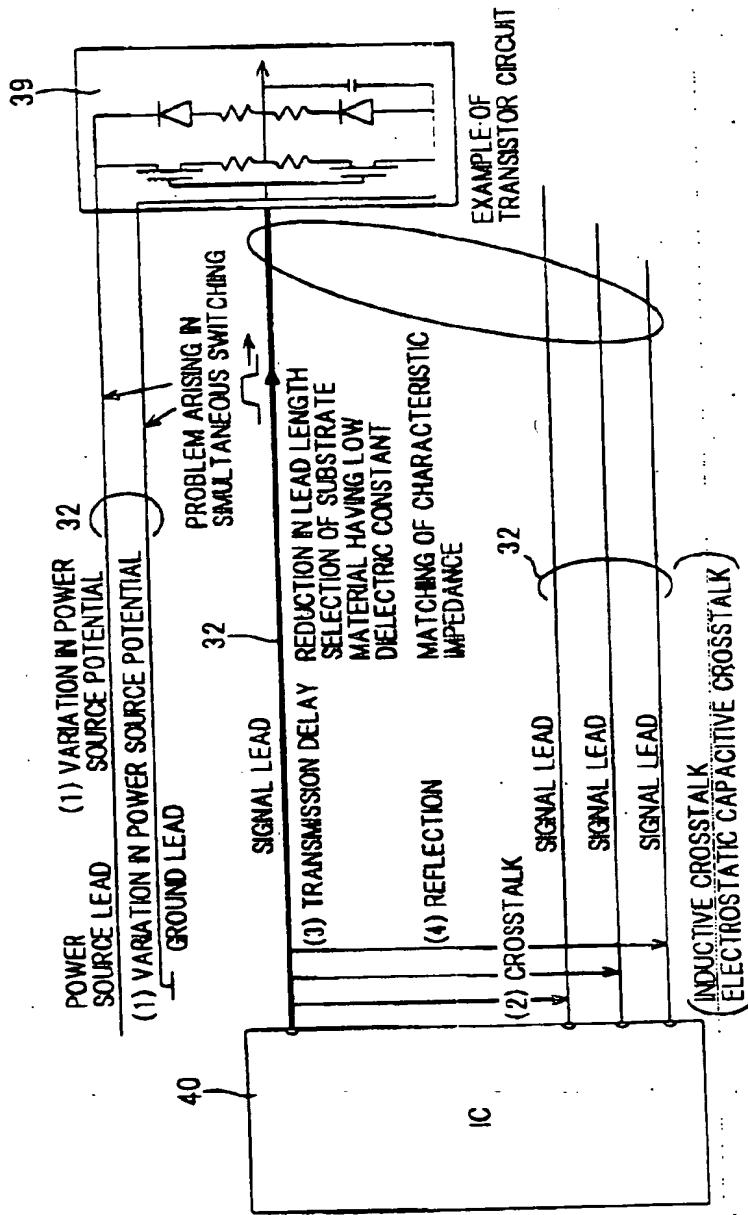


FIG.18(A)


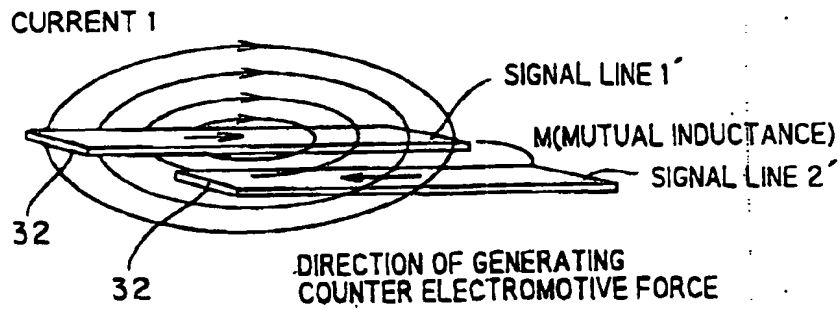


FIG.18(B)

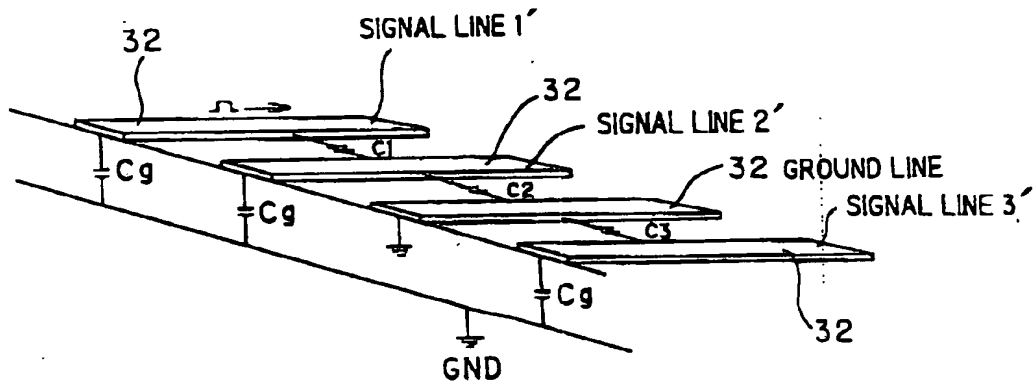

00227860-012799

09237860-012700

FIG.19

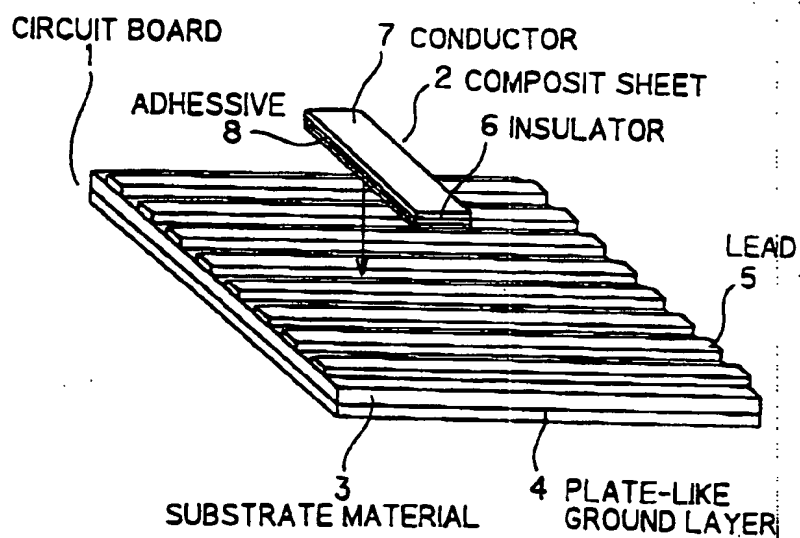


FIG.20

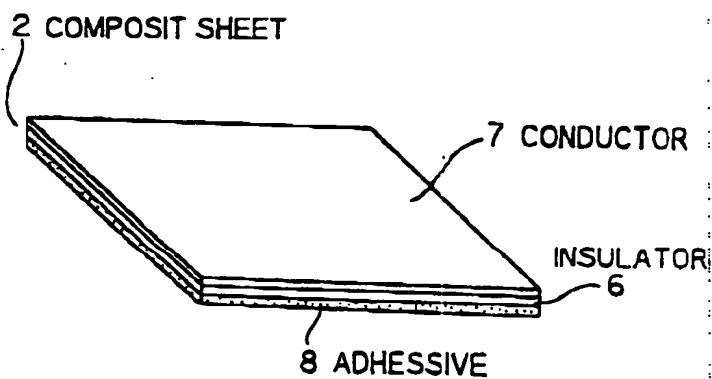


FIG. 21


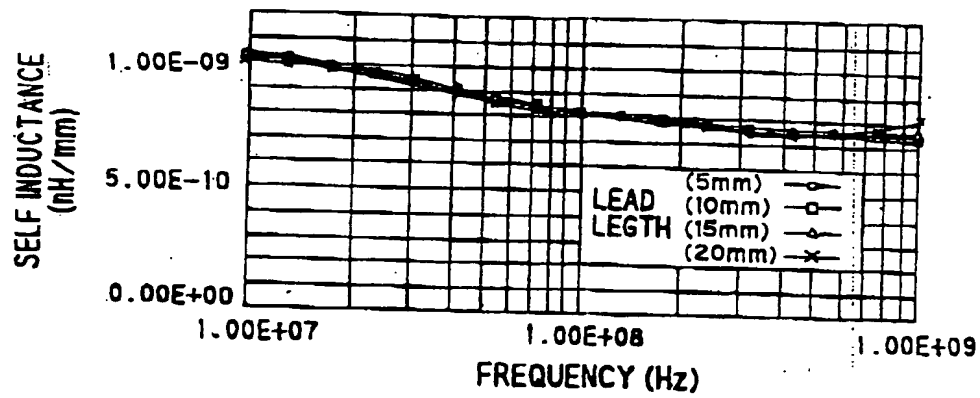


FIG. 22

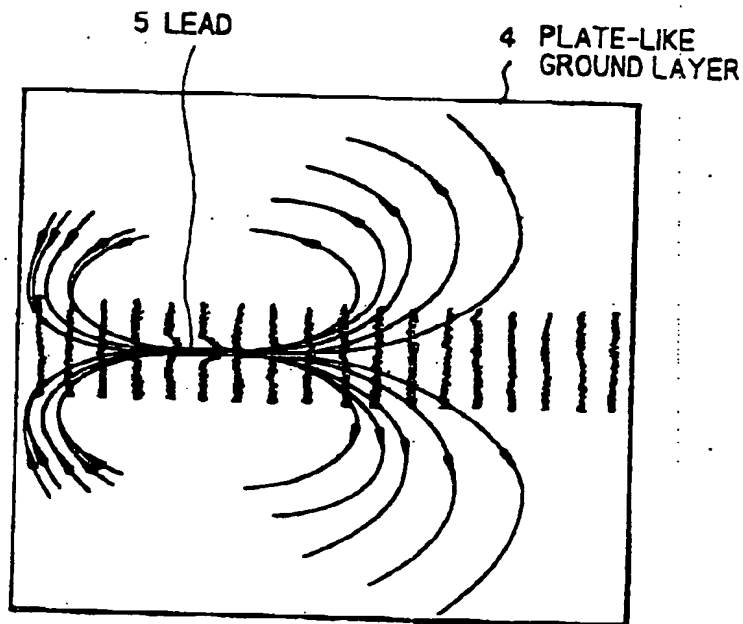

002270-0984E260